Revolabs Executive HD Microphone System — Tandberg C60/C90 Setup

This setup guide will guide you through the steps needed to properly connect a Revolabs Executive HD Microphone System to a Tandberg C60 or C90 video codec.

Note: It is important to carefully follow these instructions in order and completely. Otherwise your Executive HD Microphone System and/or the video codec may not function properly. Please read through these instructions completely before proceeding. Contact Yamaha Unified Communications, Inc. technical support: uc-support@music.yamaha.com if you have any questions.

Requirements for connecting systems:


- 1. Revolabs Executive HD 4 or 8 channel Microphone System
- 2. Tandberg C60 or C90 video codec
- 3. XLR male to mini-Phoenix cables

NOTE: The Tandberg C60 has 4 microphone inputs and the C90 has 8 microphone inputs. Therefore, the 4-channel Executive HD will interface directly only to the C60 while both the 4 and 8 channel Executive HD systems will interface directly with the C90.

NOTE: IMAGES OF SET UP SCREENS ARE DEFAULT SETTINGS FROM TANDBERG AND ARE PART OF THE TANDBERG CODEC C90 ADMINISTRATOR'S GUIDE © JULY 2009

Connecting the Cables


- 1. Connect the first mini Phoenix XLR audio cable between the Executive HD OUT 1 port and the "MIC 1" port on the Tandberg C60/C90.
- 2. Continue connecting mini Phoenix to XLR cables between the Executive HD and Tandberg codec as needed (8-channel Executive HD and C90 codec shown)

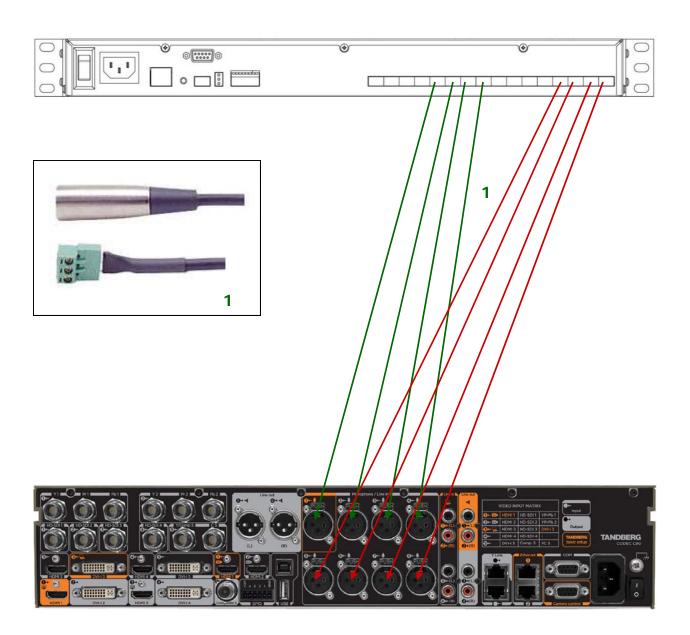


Configuring the Tandberg C60/C90 Video Codec



1. Select **SETTINGS**




2. Select ADVANCED



3. Select ADVANCED CONFIGURATION

Configuring the Tandberg C60/C90 Video Codec

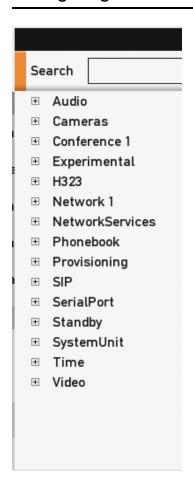

- 4. Select AUDIO
- 5. Select INPUT
- 6. Select MICROPHONE 1
- 7. Select ECHO CONTROL and turn ON
- 8. Select NOISE REDUCTION and turn ON
- 9. Do this for all applicable microphone inputs

Yamaha Unified Communications Inc. 144 North Road, Suite 3250 Sudbury, MA 01776 uc-support@music.yamaha.com 800.326.1088